MIVO™ 100 QUICK START CARD

This Quick Start Card has been created to assist you in getting started using your Mivo™ 100. Please refer to your User's Manual for detailed information on getting the most from your unit.

SETTING-UP YOUR DEVICE

1 *Unpack your Mivo™ 100*

Verify that you have these items: Mivo™ 100, Telephone Line Cord, Three Bateries, Power Adapter, Quick Start Card and User's Manual.

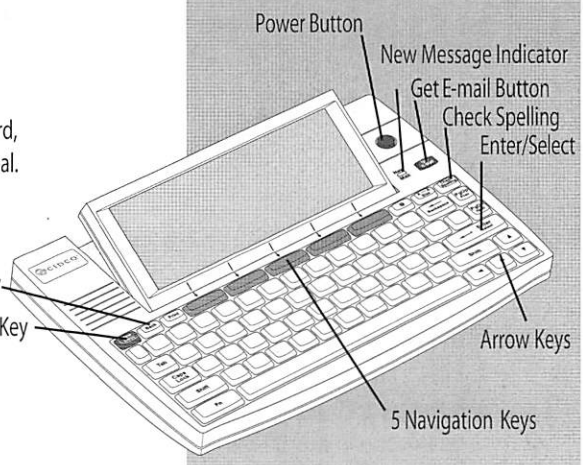

2 *Install three batteries*

Turn the device over and remove the battery compartment cover. Insert the batteries according to the directions shown on the positive (+) and negative (-) pole indicators. Replace the battery compartment cover (fig. 1).



Figure 1. Install Batteries

3 *Plug the telephone line cord*

Plug the telephone line cord into the jack on the back of the device marked "WALL". Plug the other end of the telephone line cord into a telephone wall jack. You can plug a phone into the jack on the back of the device marked "PHONE".

4 *Plug in the power adapter*

Plug the power adapter into an electrical wall outlet and into the back of the device.

Your Mivo™ 100 is designed to be carried with you wherever you go, allowing you to compose and read received e-mail anywhere. To send or receive new e-mail, simply plug your Mivo™ 100 into an available telephone line and press **Get E-mail.** Whenever possible, you should plug your Mivo™100 into an electrical outlet to save battery life.

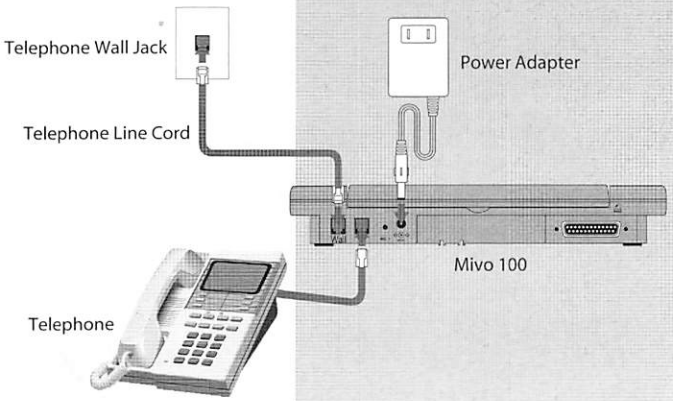

Note: Read Edit Dial-Up Information in your User's Manual for more information on choosing and editing your dial-up number. Selection of a dial-up number may result in incurring toll or long distance charges while sending and retrieving e-mail. The user is solely responsible for any and all charges resulting from choosing and or changing their dial-up number.

MIVO™ 100 QUICK START CARD

SEND AND RECEIVE E-MAIL

1 ***Create e-mail.***
From the Main Menu, press the **Navigation** key below **Create New E-Mail** (fig. 1). If you are not at the Main Menu, press the **Main Menu** key on the upper left side of the unit.

2 ***Insert e-mail address.***
With the blinking cursor (I) in the To: field (fig. 2), type the e-mail address of the intended recipient. **You must spell out the e-mail address EXACTLY as it was provided, in order to correctly deliver the message.**

3 ***Type your message.***
1. Press the ▼ **Arrow** key or the **Tab** key once to move the cursor to the Subject: field. Enter a subject (optional).
2. Press the ▼ **Arrow** or **Tab** key once more to move the cursor into the message section and type your message.

4 ***Save in your Out Box.***
When you are finished typing your message, press the **Navigation** key below **Save**. Press **Enter** to **Save in Out Box** (fig. 3). You can continue composing e-mail, saving each one in your **Outbox** to be sent all at once.

5 ***Send your e-mail messages.***
When you have created and saved all your messages, press the **Get E-mail** button (fig. 4) to send all e-mail from the **Out Box** and receive new e-mail (draft messages will not be sent, see your User's Manual for more information).

*If you are composing only one e-mail message, you can send it immediately by pressing the **Navigation** key below **Send Now**. This function only sends e-mail, it does not check for new messages. Use the **Get E-mail** button to send messages from your **Out Box** and to check for new messages at the same time.*

For complete information on setting-up and using your Mivo™ 100, please refer to your User's Manual.

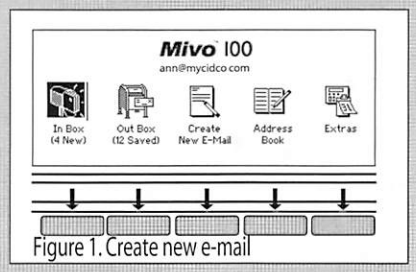

Figure 1. Create new e-mail

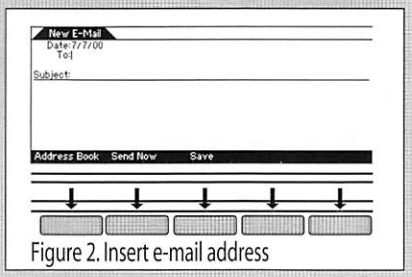

Figure 2. Insert e-mail address

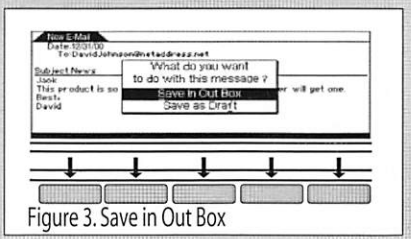

Figure 3. Save in Out Box

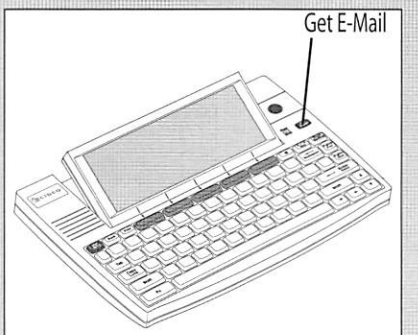

Figure 4. Press Get E-mail

GETTING HELP

- New to e-mail? Refer to "**Introduction to Mivo™ 100**" in your User's Manual.
- Having trouble? Refer to "**Troubleshooting**" or "**Commonly Asked Questions**" in your User's Manual.

No part of this publication may be reproduced, transcribed, stored in a retrieval system, or translated into any language in any form, by any means, without the written permission of CIDCO Incorporated.
CIDCO P/N 105067-01 Rev.A